

Price list n.3

Valid January 2015

Kõik hinnad on käibemaksuta. Hindadeta
traktoritele küsi pakkumist info@cedo.ee



Ma.Tra.



CONTENTS

GREENS MAINTENANCE

Heavy-duty lawn mower MA.TRA 130	3
Heavy-duty lawn mower MA.TRA 140	4
Lawn mower MA.TRA 160	5
Multi-functional greens maintenance machine MA.TRA 300	8
Implements and accessories MA.TRA 300	8
Multi-functional greens maintenance machine MA.TRA 350	6
Implements and accessories MA.TRA 350	7



HEAVY-DUTY LAWN MOWER MA.TRA 130

- Single-range hydrostatic drive with lever control
- Electromagnetic PTO clutch with blade brake
- Service brakes on the front wheels
- Parking brake on the rear axle with lever control
- Driving system by steering wheel acting on the front wheels
- Differential with lock by pedal
- Inner steering diameter mm 970
- Adjustable and cushioned seat with armrests
- Rear tow hook
- Single-blade lawn mower mm 850 with rear discharge
- 6 adjustable cutting heights
- Safety devices complying with the applicable regulations

WITH 1-CYLINDER GASOLINE ENGINE HONDA GXV 390
7,3 KW / 9,9 HP - AIR COOLED

Euro

8XC.AL000

with Tractor wheels : front 13x5.00-6 – rear 16x6.50-8

4.700



HEAVY-DUTY LAWN MOWER MA.TRA 140

- Single-range hydrostatic drive with lever control
- Electromagnetic PTO clutch with blade brake
- Service brakes on the front wheels
- Parking brake on the rear axle with lever control
- Driving system by steering wheel acting on the front wheels
- Differential with lock by pedal
- Inner steering diameter mm. 970
- Adjustable and cushioned seat with armrests
- Rear tow hook
- Single-blade lawn mower mm 850 with rear discharge
- 6 adjustable cutting heights
- Safety devices complying with the applicable regulations

**WITH 2-CYLINDER GASOLINE ENGINE BRIGGS & STRATTON VANGUARD
11,2 KW / 15,2 HP - AIR COOLED**

Euro

8XB.AG000 with Tractor wheels : front 13x5.00-6 – rear 16x6.50-8

5.610



LAWN MOWER MA.TRA. 160

- Single-range hydrostatic drive with pedal control
- Electromagnetic PTO clutch with blade brake
- Disc parking brake
- Driving system by steering wheel acting on the rear wheels
- Differential with lock by pedal
- Inner steering diameter mm. 320
- Adjustable and cushioned seat with armrests
- Rear tow hook
- 7 adjustable cutting heights mm 30 to 90
- Grass catcher lt. 300 with powered dumping system and button control
- Safety devices complying with the applicable regulations
- Without implements

WITH 2-CYLINDER GASOLINE ENGINE BRIGGS & STRATTON VANGUARD

11,2 KW / 15,2 HP - AIR COOLED

8XA.AG000 with Garden wheels : front 18x9.50-8 – rear 13x6.50-6 **Euro 5.800**

921.99006 **3-blade** lawn mower cm 113 equipped for collection, with flow accelerator for optimum filling and grass compaction into the grass catcher **1.140**

IMPLEMENTS

922.99050 Mulching kit **Euro 120**



MULTI-FUNCTIONAL MACHINE MA.TRA. 350 - 4WD

- Motor cooling system with hydraulically driven suction fan
- Radiator with oil/air self-cleaning mesh. Automatic inversion of fan direction controlled by sensor for grids cleaning.
- Cyclone air self-cleaning pre-filter
- Hydrostatic drive with continuous speed variation 0 to 20 km/h. Servo-controlled pump with changing capacity designed to facilitate the use of forward and reverse motion pedal
- 4-wheel traction via 4 hydraulic motors fitted on the wheels
- Differential with automatic and manual lock by button
- Inner steering diameter mm. 320
- Multi-disc PTO electro-hydraulic clutch. PTO action independent from the suction fan
- Disc service brakes on the front wheels
- Lever parking brake acting on service brakes
- Hydraulic steering on rear wheels, adjustable steering column and wheel
- Minimum steering radius cm 62
- 2-cylinder hydraulic lift with 2-point coupling
- Tank capacity lt 35
- Hydraulic oil tank capacity lt 35
- Blade and fan automatic deactivation when the grass catcher is full
- Adjustable seat with spring suspension, arms and high back
- Integrated control systems in the board on the steering column
- Grass collector lt. 100 with hydraulic lifting and tilting system at cm 210 height. Sound signal and automatic blades/suction fan stop when the collector is full. Powered moving deflector to ensure the collector is filled evenly
- Grass suction device with independent deactivation system, powered by hydraulic motor with safety valve against accidental shocks
- Front hydraulic control valve kit
- Safety devices complying with the applicable regulations
- Without implements

**WITH 4-CYLINDER DIRECT INJECTION ENGINE YANMAR 4TNV88
32,3 KW / 44 HP - WATER COOLED**

- 8XD.AT000** with Garden wheels : front 24x12.00-12 – rear 20x8.00-10
Lighting system homologated for road circulation (Italy only)
- 8XD.AT200** with Garden wheels : front 24x12.00-12 – rear 20x8.00-10
Lighting system homologated for road circulation (Italy only) and cabin
with ventilation and heating system
- 8XD.AT300** with Garden wheels : front 24x12.00-12 – rear 20x8.00-10
Lighting system homologated for road circulation (Italy only) and cabin
with air conditioning

IMPLEMENTS AND ACCESSORIES

- 921.99213** **Front cutting bar system** cm 155 with gear drive,
swivel shock-proof blades fitted on discs, rear discharge equippedd
for possible cut with collection, vertical tilting system for easy inspection
and maintenance, 8 adjustable cutting heights mm 25 to 110
Mulching kit included
- 921.99079** Front lawn mower cm 150 with belt drive.
Areator kit included
- 921.99080** Snow blade cm 175 with rubber end piece



MULTI-FUNCTIONAL MACHINE MA.TRA. 300 - 4WD

- Motor cooling system with radiator with oil/air self-cleaning mesh
- 2-range hydrostatic drive, slow for work and fast for transfer
- 4-wheel traction with double pedal control - automatic rear wheels deactivation when in fast mode
- 3 differentials (anti-scalp system on front and central differentials) with pedal lock
- PTO electro-hydraulic clutch
- Service drum brakes on front wheels
- Lever parking brake acting on service brakes
- Hydraulic steering on rear wheels, adjustable steering column and wheel
- Minimum steering radius mt 0,40 (zero with action of the independent brakes)
- 2-cylinder hydraulic lift with 2-point coupling
- Tank capacity lt 46
- Adjustable seat with spring suspension, arms and high back
- Integrated control systems in the board on the steering column
- Front hydraulic control valve kit
- Safety devices complying with the applicable regulations
- Without implements


WITH DIRECT-INJECTION 3-CYLINDER DIESEL ENGINE YANMAR 3TNV82 21,9 KW / 29,4 HP - WATER COOLED

8X6.V3100C with Garden wheels : front 26x12.00-12 – rear 18x8.50-8
Lighting system homologated for road circulation (Italy only)

8X6.V3110C with front wheels Terra Tyre 26x12.00-12
and rear wheels Garden 18x8.50-8,
Lighting system homologated for road circulation (Italy only)

IMPLEMENTS FOR MA.TRA 300

921.94000 Front cutting deck "MUSTER SYSTEM" cm 140, belt drive, hydraulic adjustable cutting height mm 25 to 85

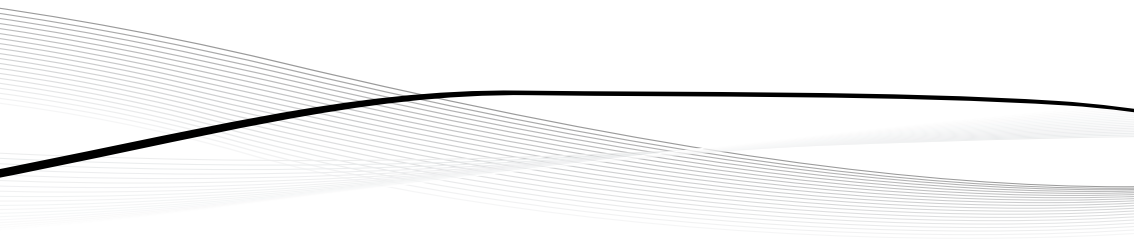

BCS S.p.A.

Viale Mazzini, 161 - 20081 Abbiategrasso (Milano)
Tel. +39 02 94821 - Fax +39 02 94960800 - info@bcs-ferrari.it